






CSTW輕型軸用快速螺帽

碩恆精密五金有限公司
Web:www.shwjsy.com
E-mail:info@shwjsy.com
TEL:0769-85129020/85129050
89874068 FAX:0769-82882032

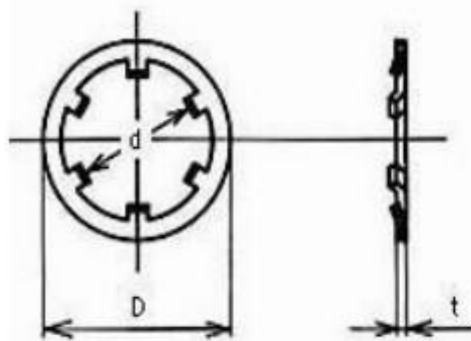

Size-No.		Ring dimension						Applicable shaft		load kgf
		d		D		t	Nos.of Teeth	S		
		Basic	Tol.	Basic	Tol.			Basic	Tol.	
CSTW-	2	1.9	±0.05	6	±0.2	0.25	3	2	+0.03 -0	6
	2.4	2.2	+0.1	6.4		0.25	3	2.4	+0.03	6
	3	2.8	0	8		0.25	4	3		9
	3.5	3.3	0 0. 1	8.5		0.25	4	3.5		10
	4	3.8	+0.1 0	9		0.25	4	4		12
	4.5	4.3		10		0.25	5	4.5		14
	5	4.8		10		0.25	5	5		16
	6	5.8		11		0.25	5	6		18
	8	7.8		13		0.25	5	8		21
	10	9.8		15.4		0.25	6	10		21
	12	11.8		17.8	0.4	6	12	23		
	14	13.8		20.3	0.4	6	14	±0.05	23	
	16	15.8	22.8	0.4	6	2	23			
	18	17.8	25	0.4	8	18	25			
	19	18.7	±0.15	25.4	0.4	6	19		25	
	20	19.8	+0.1 0	28	0.4	8	20		25	
	22	21.7	±0.15	28.5	0.4	6	22		25	

Material=carbon spring steel.(stainless spring steel)

Hardness=HRC40-50

Finish=Black phosphate coating(ACP)

Note:※ Mark are according to our company specification