




ETW E形扣環

碩恆精密五金有限公司
Web:www.shwjsy.com
E-mail:info@shwjsy.com
TEL:0769-85129020/85129050
89874068 FAX:0769-82882032

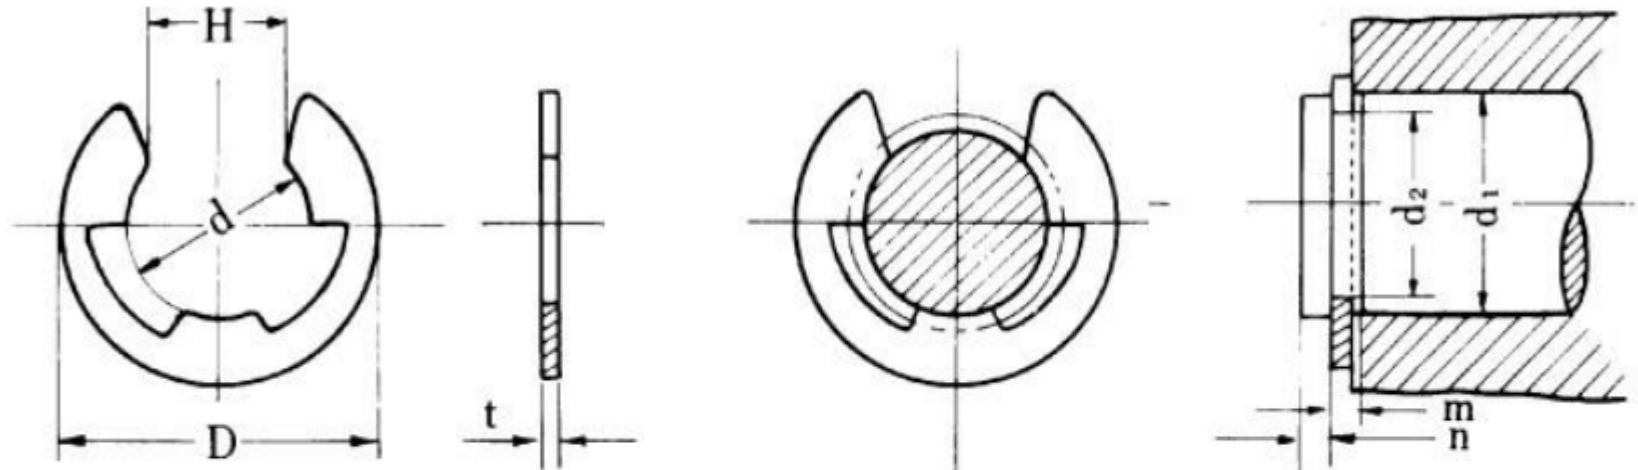

Size-No.		Ring dimension								Groove dimension							
		d		D		H		t		d1		d2		m		n	
		Basic	Tol.	Basic	Tol.	Basic	Tol.	Basic	Tol.	Over	Under	Basic	Tol.	Basic	Tol.	Min.	
ETW-	※ 0.6	0.6	±0.04	1.5	±0.1	0.45	±0.02	0.2	±0.02	0.8	1	0.65	+0.05 0	0.3	+0.05 0	0.4	
	※ 0.7	0.67	0 —	2		0.55	0 0.1	0.2		0.9	1.2	0.7		0.3		0.4	
	0.8	0.8	0.08	2		0.7	0 —0.25	0.2		1	1.4	0.82		0.3		0.4	
	※ 1	0.98	0 — 0.09	2.8		0.88		0.2		1.3	1.7	1		0.3		0.5	
	1.2	1.2		3	±0.2	1		0.3	±0.025	1.4	2	1.23	+0.06 0	0.4	+0.1 0	0.6	
	1.5	1.5		4		1.3		0.4	±0.03	2	2.5	1.53		0.5		0.8	
	※ 1.9	1.9		4.5		1.7		0.4		2.5	3	1.93		0.5		1	
	2	2		5	±0.2	1.7		0.4		2.5	3.2	2.05		0.5		1	
	※ 2.3	2.3	0 — 0.12	6		2	—0.3	0.4	±0.04	3	4	2.35	+0.09 0	0.5	+0.14 0	1	
	2.5	2.5		6		2.1		0.4		3.2	4	2.55		0.5		1	
	3	3		7		2.6		0.6	±0.05	4	5	3.05		0.7		1	
	※ 3.2	3.2		7	±0.3	2.8		0.6		4	5	3.25	+0.11 0	0.7		1.2	
	4	4	0 — 0.15	9		3.5		0.6		5	7	4.05		0.7		1.2	
	5	5		11		4.3		0.6		6	8	5.05		0.7		1.2	
	6	6		12		5.2	0 —0.45	0.8	±0.06	7	9	6.05		0.9		1.2	
	7	7	0 — 0.18	14	±0.3	6.1		0.8		8	11	7.1	+0.13 0	0.9		1.5	
	8	8		16		6.9		0.8		9	12	8.1		0.9		1.8	
	9	9		18		7.8		0.8		10	14	9.1		0.9		2	
	10	10		20	±0.3	8.7	0 —0.5	1	±0.07	11	15	10.15		1.15		2	
	12	12	0 — 0.21	23		10.4		1		13	18	12.15	+0.13 0	1.15		2.5	
	15	15		29		13		1.5		16	24	15.15		1.65		3	
	19	19		37		16.5		1.5		20	31	19.15		1.65		3.5	
	24	24		44		20.8		2		25	38	24.15		2.2		4	

Material=carbon spring steel.(stainless spring steel)

Hardness=HRC44-52

Finish=Black phosphate coating(ACP)

Note:※ Mark are according to our company specification