




RTW孔用扣環

碩恆精密五金有限公司
Web:www.shwjsy.com
E-mail:info@shwjsy.com
TEL:0769-85129020/85129050
89874068 FAX:0769-82882032

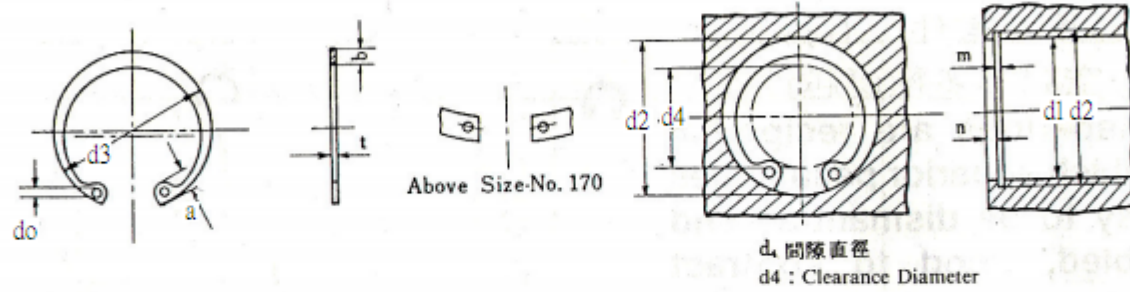

mm

Size-NO.	Ring dimension							Ref. d4	Groove dimension						PRICE TWD
	d3		t		b	a	do		d1	d2		m		Ref.n Min	
	Basic	Tol.	Basic	Tol.						Basic	Tol.	Basic	Tol.		
RTW 6	6	6.7	±0.18	0.4	0.7	1.6	0.8	2.5	6	6.25	+0.06 -0	0.5	+0.1 -0	1	
7	7.7	0.8			1.8	3		7	7.3						
8	8.8	0.9		1.7	3.5	8		8.4							
9	9.8	0.6		1.1	2.2	5	9	9.4	0.7						
10	10.7	±0.04		1	±0.04	1.5	2.8	1.2	3	10	10.4	+0.11 -0	1.15		
11	11.8					1.5	3		4	11	11.4				
12	13					1.7	3.1		5	12	12.5				
13	14.1					1.7	3.1	6	13	13.6	+0.21 -0			1.5	
14	15.1					1.9	3.6	7	14	14.6					
15	16.2					1.9	3.6	8	15	15.7					
16	17.3		1.9			3.7	8	16	16.8						
17	18.3		1.9			3.8	9	17	17.8						
18	19.5		2.4			4	10	18	19						
19	20.5		2.5			4	11	19	20						
20	21.5	2.5	4	12	20	21									
21	22.5	2.5	4.1	12	21	22									
22	23.5	±0.2	2.5	4.1	13	22	23	+0.14 -0	2						
*23	24.5	±0.25	1.2	±0.05	2.5	4.1	13.6			*23	24.1				
24	25.9				2.5	4.3	15			24	25.2				
25	26.9				3	4.4	16			25	26.2				
26	27.9				3	4.6	16			26	27.2				
*27	29.1				3	4.6	16.6			*27	28.4				
28	30.1				3	4.6	18			28	29.4				
*29	31.1				3	4.8	18.4			*29	30.4				
30	32.1				3	4.7	20			30	31.4				
*31	33.1				3	5.2	19.6			*31	32.7				
32	34.4				±0.25	1.5	±0.05	3.5	5.2	21	32	33.7			
*33	35.5	3.5	5.2	21.2				*33	34.7						
34	36.5	3.5	5.2	23				34	35.7						
35	37.8	3.5	5.2	24				35	37						
36	38.8	3.5	5.2	25				36	38						
37	39.8	3.5	5.2	26				37	39						
38	40.8	4	5.3	27				38	40						
*39	42	4	5.4	27				*39	41.2						
40	43.5	±0.4	1.75	±0.06				4	5.7	28	40	42.5			
42	45.5							4	5.8	30	42	44.5			
*43	46.5							*43							
45	48.5				4.5	5.9	33	45	47.5						
46	49.7				5	5.7	33	46	48.5						
47	50.5				4.5	6.1	34	47	49.5						
48	51.5				4.5	6.2	35	48	50.5						
50	54.2				4.5	6.5	37	50	53						
52	56.2				5.1	6.5	39	52	55						
55	59.2				±0.45	2	±0.06	5.1	6.5	41	55	58			
56	60.2	5.1	6.6	42				56	59						
58	62.2	5.1	6.8	44				58	61						
60	64.2	5.5	6.8	46				60	63						
62	66.2	5.5	6.9	48				62	65						
63	67.2	5.5	6.9	49				63	66						
65	69.2	5.5	7	50				65	68						
68	72.5	6	7.4	53				68	71						
		2.7	2.5												

Material=carbon spring steel.(stainless spring steel)

Hardness=HRC44-52

Finish=Black phosphate coating(ACP)

Note:※ Mark are according to our company specification

Shuo Heng Precision Metal Co., Ltd