




# SPN重型轴用快速螺帽

碩恆精密五金有限公司  
Web:www.shwjsy.com  
E-mail:info@shwjsy.com  
TEL:0769-85129020/85129050  
89874068 FAX:0769-82882032

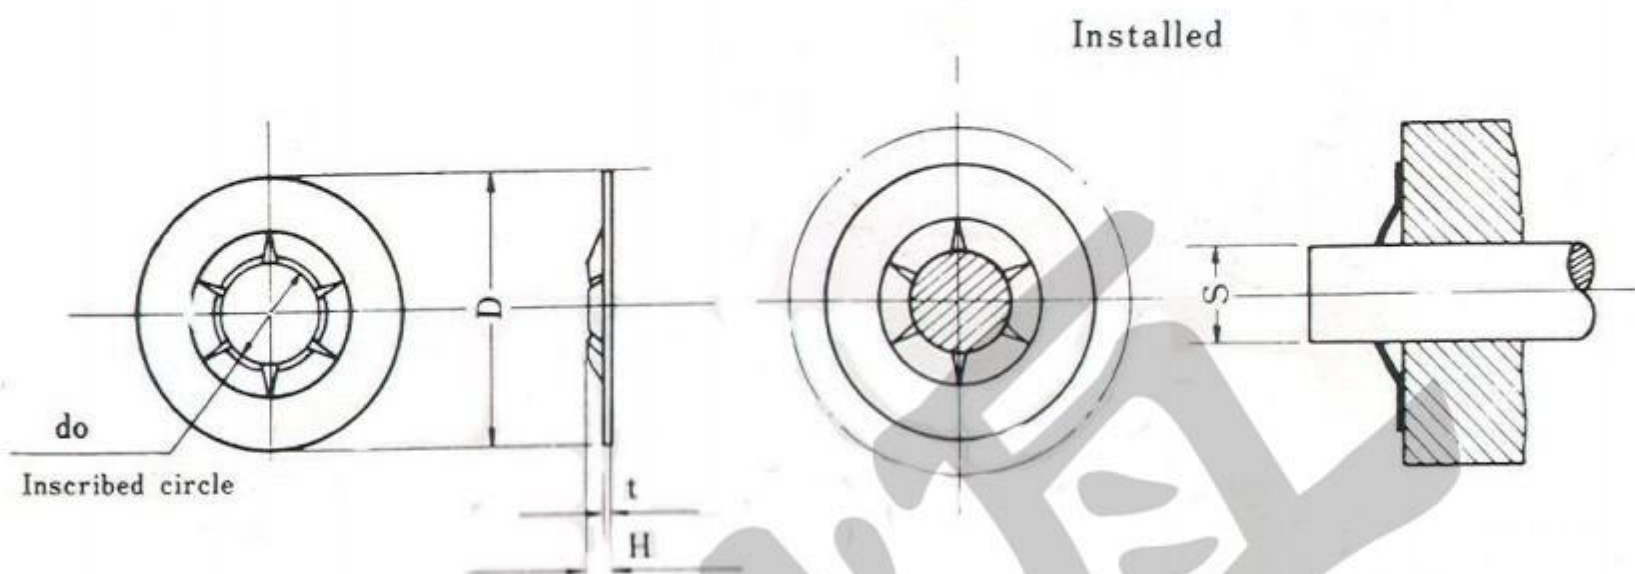

Unit. mm

| Size-NO. |     | Ring dimension |             |      |      |      |       | Applicable shaft |                | Thrust Load Kgf. | PRICE USD |
|----------|-----|----------------|-------------|------|------|------|-------|------------------|----------------|------------------|-----------|
|          |     | d0             |             | D    | H    | t    |       | S                |                |                  |           |
|          |     | Basic          | Tol.        |      |      |      |       | Basic            | Tol.           |                  |           |
| SPN      | 1.2 | 1.1            | 0<br>-0.1   | 4.5  | 0.6  | 0.25 | ±0.03 | 1.2              | +0.04<br>-0.03 | 20               |           |
|          | 1.5 | 1.4            |             | 5.2  | 0.6  | 0.25 |       | 1.5              |                | 20               |           |
|          | 2   | 1.9            |             | 6    | 0.7  | 0.25 |       | 2                |                | 20               |           |
|          | 2.4 | 2.3            |             | 7    | 0.8  | 0.25 |       | 2.4              |                | 45               |           |
|          | 2.6 | 2.5            |             | 7    | 0.9  | 0.25 |       | 2.6              |                | 45               |           |
|          | 3   | 2.9            | +0<br>-0.15 | 10   | 1.3  | 0.3  | ±0.04 | 3                | +0.05<br>-0.03 | 100              |           |
|          | 4   | 3.9            |             | 12   | 1.4  | 0.3  |       | 4                |                | 100              |           |
|          | 5   | 4.9            |             | 14   | 1.55 | 0.4  |       | 5                |                | 150              |           |
|          | 6   | 5.9            |             | 16   | 1.75 | 0.4  |       | 6                |                | 170              |           |
|          | 7   | 6.9            |             |      |      |      |       |                  | +0.06<br>-0.03 |                  |           |
|          | 8   | 7.9            |             | 17.5 | 1.8  | 0.5  |       | 8                |                | 180              |           |
|          | 10  | 9.9            |             | 21   | 2.2  | 0.7  |       | ±0.05            |                | 10               | 320       |
|          | 12  | 11.9           |             | 27   | 2.8  | 0.9  |       | ±0.06            |                | 12               | 400       |

Material=carbon spring steel.(stainless spring steel)

Hardness=HRC40-50

Finish=Black phosphate coating(ACP)

Note:※ Mark are according to our company specification

Shuo Heng Precision Metal Co., Ltd