




STW軸用扣環

碩恆精密五金有限公司
Web:www.shwjy.com
E-mail:info@shwjy.com
TEL:0769-85129020/85129050
/89874068 FAX:0769-82882032

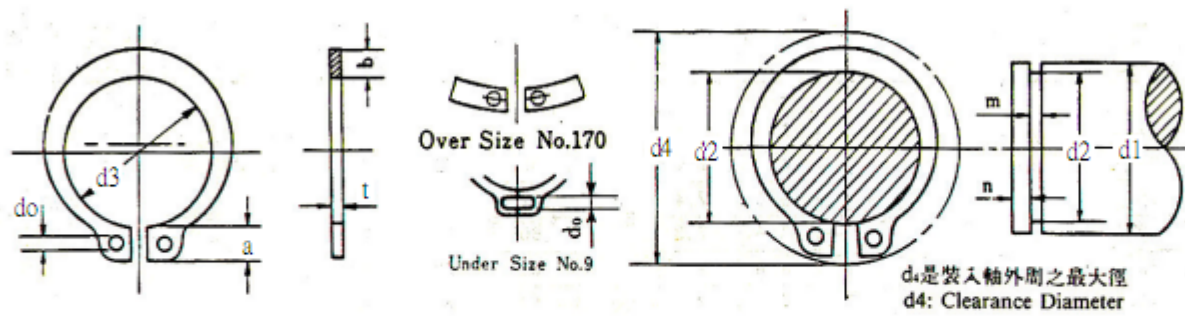

d4是裝入軸外圍之最大徑
d4: Clearance Diameter

Unit. mm

Size-NO.	Ring dimension							Ref. d4	Groove dimension						PRICE USD	
	d3		t		b	a	do		d1	d2		m		Ref.n		
	Basic	Tol.	Basic	Tol.	Approx.	Approx.	Min.			Basic	Tol.	Basic	Tol.	Min		
STW 3	3	2.7	+0.04 -0.15	0.25	±0.025	0.5	1.7	0.7	7	3	2.85		0.35	+0.1 -0	0.3	
4	4	3.7		0.4	±0.03	0.9	2.2	0.8	9	4	3.8	+0	0.5			
5	5	4.7		0.6		1.1	2.4		10.5	5	4.8	-0.04	0.7			
6	6	5.6	0.7		1.3	2.8	1		12	6	5.7		0.8	0.5		
7	7	6.5	+0.1 -0.2	0.8	1.4	3		14	7	6.7	+0	0.9	0.6			
8	8	7.4			1.6	3		15	8	7.6	-0.06					
9	9	8.4			1.8	3.2	16	9	8.6							
10	10	9.3	±0.15	±0.04	1.8	3	1.5	17	10	9.6	+0 -0.06	1.15	1.5			
11	11	10.2			2	3.1		18	11	10.5						
12	12	11.1			2.1	3.2		19	12	11.5						
13	13	12	±0.18	1	2.1	3.3	1.7	20	13	12.4	+0 -0.11	1.35	1.5			
14	14	12.9			2.2	3.4		22	14	13.4						
15	15	13.8			2.2	3.5		23	15	14.3						
16	16	14.7			2.2	3.6		24	16	15.2						
17	17	15.7			2.2	3.7		25	17	16.2						
18	18	16.5			2.6	3.8		26	18	17						
19	19	17.5	±0.2	1.2	2.7	3.8	2	27	19	18	+0 -0.21	1.65	+0.14 -0	2		
20	20	18.5			2.7	3.9		28	20	19						
21	21	19.5			2.7	4		30	21	20						
22	22	20.5			2.7	4.1		31	22	21						
23	23	21.4			2.9	4.5		32.5	23	22						
24	24	22.2			3.1	4.2		33	24	22.9						
25	25	23.2	±0.25	±0.05	3.1	4.3	2.5	34	25	23.9	+0 -0.25	1.9				
26	26	24.2			3.1	4.4		35	26	24.9						
27	27	25			3.3	4.5		36	27	25.8						
28	28	25.9			3.1	4.6		38	28	26.6						
29	29	26.9			3.5	4.7		39	29	27.6						
30	30	27.9			3.5	4.8		40	30	28.6						
*31	31	28.6	±0.25	1.5	3.5	4.9	2.5	*31			+0 -0.25	2.2				
32	32	29.6			3.5	5		43	32	30.3						
*33	33	30.5			3.7	5.2		*33								
34	34	31.5	±0.4	1.8 (1.75)	4	5.3	2.5	45	34	32.3	+0 -0.3	2.2				
35	35	32.2			4	5.4		46	35	33						
36	36	33.2			4	5.4		47	36	34						
*37	37	34.2						*37								
38	38	35.2			4.5	5.6		50	38	36						
*39	39							*39								
40	40	37	±0.45	2	4.5	5.8	2.5	53	40	38	+0 -0.3	2.2				
42	42	38.5			4.5	6.2		55	42	39.5						
45	45	41.5			4.8	6.3		58	45	42.5						
*46	46	42.5			4.8	6.7		*46		43.5						
47	47	43.4			5	6.6		61	47	44.5						
48	48	44.5			4.8	6.5		62	48	45.5						
50	50	45.8	±0.45	2	5	6.7	2.5	64	50	47	+0 -0.3	2.2				
52	52	47.8			5	6.8		66	52	49						
55	55	50.8			5	7		70	55	52						
56	56	51.8			5	7		71	56	53						
58	58	53.8			5.5	7.1		73	58	55						
60	60	55.8			5.5	7.2		75	60	57						
62	62	57.8	±0.45	2	5.5	7.2	2.5	77	62	59	+0 -0.3	2.2				
63	63	58.8			5.5	7.3		78	63	60						

Material=carbon spring steel.(stainless spring steel)

Hardness=HRC44-52

Finish=Black phosphate coating(ACP)

Note:※ Mark are according to our company specification

Shuo Heng Precision Metal Co., Ltd.