




CTW C形扣環

碩恆精密五金有限公司
Web:www.shwjsy.com
E-mail:info@shwjsy.com
TEL:0769-85129020/85129050
89874068 FAX:0769-82882032

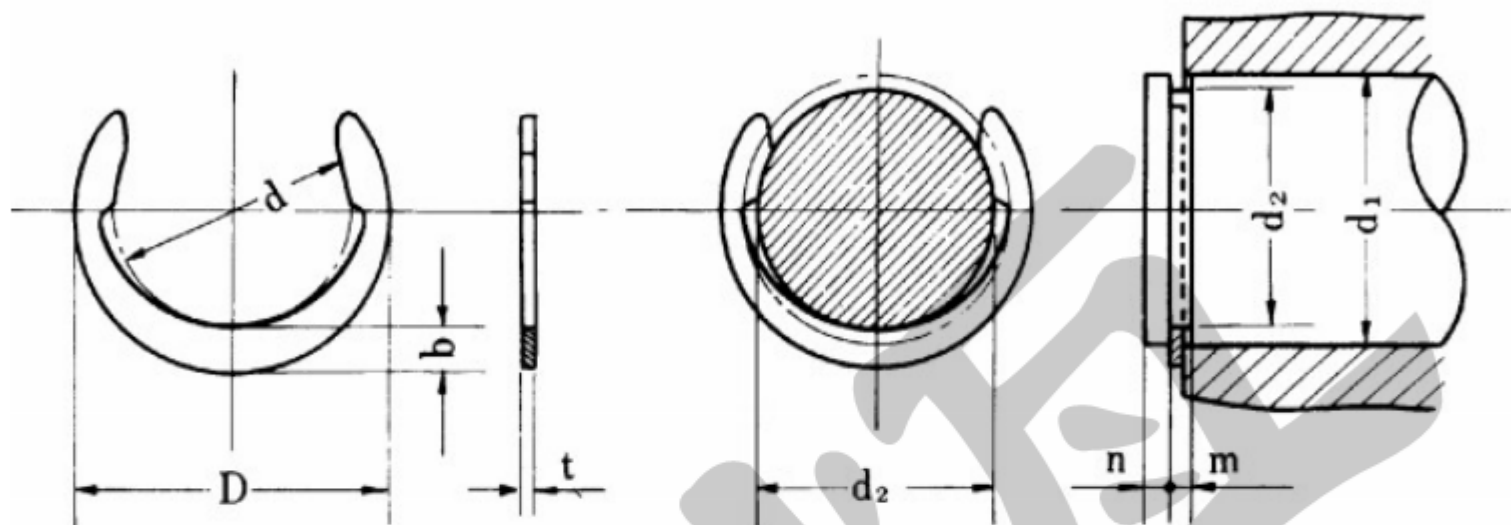

Unit. mm

Size-NO.	Ring dimension						Groove dimension						PRICE TWD
	d		D	b	t		d1	d2		m		n	
	Basic	Tol.			Basic	Tol.		Basic	Tol.	Basic	Tol.	Min	
12	2.59	+0.05	4.17	0.79	0.4	±0.03	3.2	2.69	±0.04	0.48	+0.04	0.5	
18	4.09	-0.1	6.19	1.05	0.4		4.8	4.19		0.48	0	0.6	
21	4.75	+0.07 -0.13	6.99	1.12	0.6	±0.04	5.6	4.9	±0.05	0.7	+0.06 0	0.7	
25	5.36		7.9	1.27	0.6		6.4	5.59		0.7		0.8	
31	6.86		9.56	1.35	0.6		7.9	7.01		0.7		0.9	
37	8.33		11.37	1.52	0.6		9.5	8.51		0.7		1	
40	9.12		12.32	1.6	0.6		10.3	9.25		0.7		1.1	
43	9.8		13.1	1.65	0.6		11.1	9.98		0.7		1.1	
46	10.54	±0.15	14	1.73	0.6	±0.05	11.9	10.69	±0.07	0.7	+0.08 0	1.2	
50	11.2		14.7	1.78	0.9		12.7	11.43		1		1.3	
56	12.62		16.56	1.98	0.9		14.3	12.88		1		1.4	
81	18.31		23.23	2.46	1.4		±0.06	20.6		18.59		1.5	2.3

Material=carbon spring steel.(stainless spring steel)

Hardness=HRC44-52

Finish=Black phosphate coating(ACP)

Note:※ Mark are according to our company specification

Shuo Heng Precision Metal Co., Ltd